


# WestLab Audio

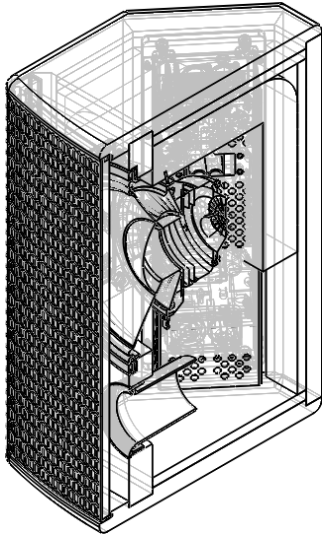

## Product Data

8" Coax Top

Series: LABRAT

Model: LABRAT 8 (full active)

Dimensions H 390 x W 260 x D 258 mm

Local Box H 410 x W 295 x D 275 mm

Export Box H 455 x W 370 x D 330 mm


Net weight 10 kg

Export boxed 12 kg

---

Total System Power (RMS/Peak)	450/800 W
Max SPL (program)	121 dB
Max SPL (peak)	127 dB
Crossover Type	Digital IIR Filter (internal with 5 Presets)
Frequency Range (-6 dB)	62 Hz - 20,5 kHz
Crossover Frequency	1,27 kHz
Directivity (horizontal x vertical)	100° x 100° (1kHz - 20 kHz)
Low Frequency Driver Chassis type	Cone driver, port loaded
Low Frequency Driver Magnet	Neodymium
Low Frequency Driver Chassis diameter	8" / 205 mm
Low Frequency Driver Voicecoil diameter	2" / 50,8 mm
High Frequency Driver Chassis type	Coaxial ringradiator compression driver
High Frequency Driver Magnet	Neodymium
High Frequency Driver Chassis diameter	1" / 25,4 mm
High Frequency Driver Voicecoil diameter	1,75" / 44,4 mm

Frequency response LR 8

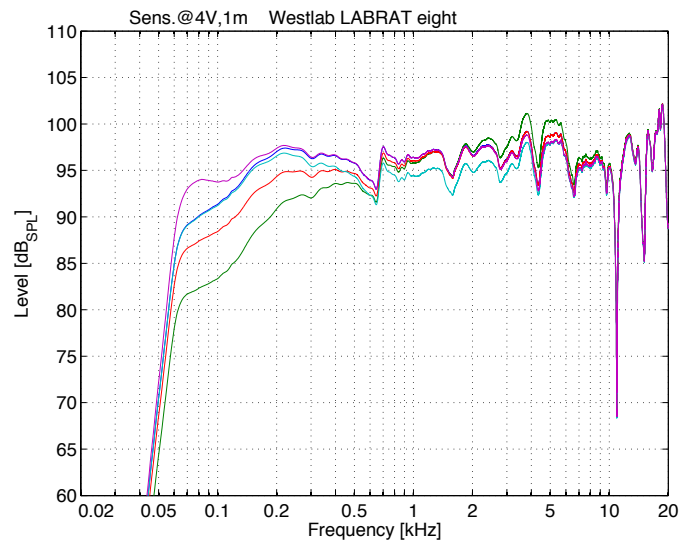

Horizontal Isobars LR 8

